



FDB Flange Dowel Box

for slab-on-ground applications



Leviat

We imagine, model and make engineered products and innovative construction solutions that help turn architectural visions into reality and enable our construction partners to build better, safer, stronger and faster.

Leviat is a world leader in connecting, fixing, lifting and anchoring technology.



From the build of new schools, hospitals, homes and infrastructure, to the repair and maintenance of heritage structures, our engineering skills are making a difference around the world.

We provide technical design assistance at every stage of a project, from initial planning to installation and beyond.

Our technical support services range from simple product selection through to the development of a fully customised project-specific design solution.

Every promise we make locally, has the commitment and dedication of our global team behind it. We employ almost 3,000 people at 60 locations across North America, Europe and Asia-Pacific, providing an agile and responsive service worldwide.



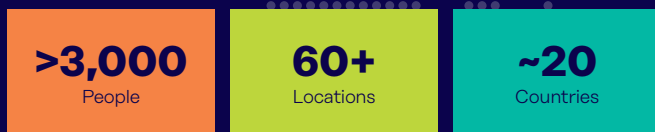


Structural Connections

Systems to form robust, efficient connections, and continuity of concrete reinforcement as necessary, between walls, slabs, columns, beams and balconies, providing structural integrity as well as enhanced thermal and acoustic performance.


- Insulated balcony connectors
- Reinforcing bar couplers
- Concrete Connections
- Reinforcement continuity systems
- Punching shear reinforcement
- Shear load connectors
- Floor Joint Systems
- Precast / Reinforced Columns
- Infrastructure Products
- Precast Connections
- Acoustic dowels and bearings
- Prestress

Other areas of expertise:




Lifting & Bracing

Systems for the safe and efficient transportation, lifting and temporary bracing of cast concrete elements and tilt-up panels before permanent structural connections are made.



Façade Support & Restraint

Systems for the safe and thermally-efficient fixing of the external building envelope, including brick and natural stone, insulated sandwich panels, curtain walling and suspended concrete façades, and also the repair and strengthening of existing masonry installations.




Anchoring & Fixing

Systems for fixing secondary fixtures to concrete, including anchor channels, bolts and inserts; also tension rod systems for roofs and canopies.



Formwork & Site Accessories

Non-structural accessories that complement our engineered solutions and help keep your construction environment operating safely and efficiently, including moulds for casting standard and special concrete elements and construction essentials such as reinforcing bar spacers.



Industrial Technology

Mounting channels, pipe clamps and other versatile framing systems that provide safe fixing in a wide range of industrial applications.

Leviat product ranges:

Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass

FDB Flange Dowel Box

An effective solution to allow for end expansion and large lateral movements in normal and heavy-duty industrial slabs.

Connolly FDB Flange Dowel Boxes are high quality galvanised steel sleeves which provide large lateral movement allowance as well as end expansion capabilities. They are designed to be used in post-tensioned concrete slabs or wide joint opening specifications with Connolly square dowels which can transfer high loads across construction joints in slab-on-ground applications. The box encases one half of the dowel to de-bond it from the concrete. Connolly FDB Flange Dowel Boxes allow for expansion, contraction and lateral movement at the joint.

Connolly Flange Dowel Boxes are available in four standard sizes - 16mm, 20mm, 25mm and 32mm. Custom sizes are also available on request.

With V-notches on all sides, they can be easily and accurately installed on formwork, ensuring perfect dowel alignment. The wide flange design ensures the dowel remains square to the formwork during the concrete pour.

Connolly FDB Flange Dowel Boxes can be used in contraction and expansion joints. The closed cell foam insert in the sleeve allows for lateral movement and end expansion.

As the slab panels shrink towards their centres, with potential differential shrinkage rates, the adjacent slab panels will move laterally as well as horizontally. Free lateral movement minimises the cracking risks related to concrete shrinkage.

The system utilises square dowels to accommodate larger joint openings in post-tensioned slabs or any other application with large shrinkage.

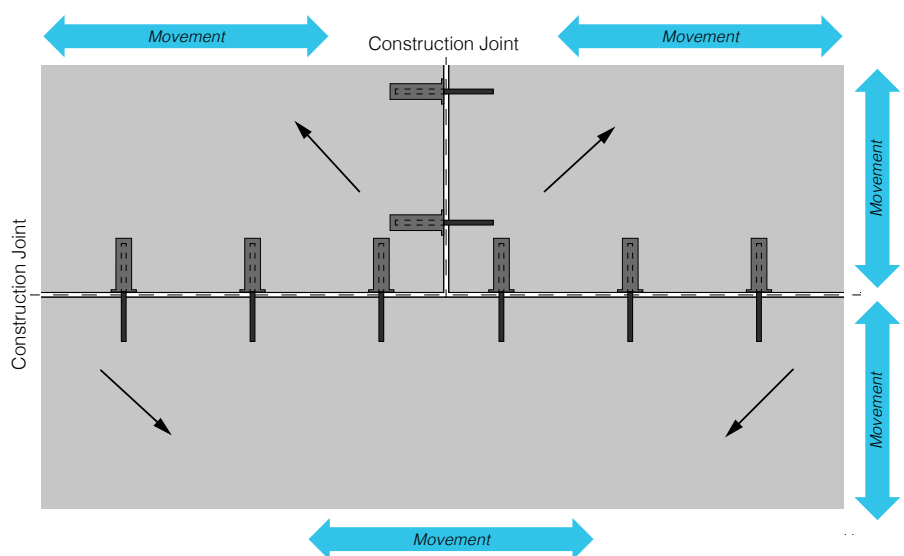


Diagram showing movement of slab in both directions. Each panel shrinks toward its centre with differential shrinkage resulting in dowel lateral movement.



Features

- Large lateral movement capacity (+/- 20mm)
- Large expansion joint capacity (20mm)
- V-notches simplify installation
- Quicker dowel installation
- Ability to fix to timber and steel formwork with ease
- Suitable for construction, contraction and expansion joints



Manufactured in an
ISO accredited factory



Made in
Australia



Cost-effective
solution



Nationwide
distribution network



Dedicated sales and
technical support





Standard items
available ex stock

Product Specifications


The Connolly Flange Dowel Box is available in four standard sizes. Each system includes a galvanised friction cut square dowel and one high quality galvanised steel sleeve.

Item Code	Dowel		Length (mm)	Sleeve Lateral Movement (mm)	End Expansion (mm)
	Size (mm)	Length (mm)			
FLB16S200L20E20	16 x 16 sq	400	220	+/-20	20
FLB20S200L20E20	20 x 20 sq	400	220	+/-20	20
FLB25S225L20E20	25 x 25 sq	450	245	+/-20	20
FLB32S225L20E20	32 x 32 sq	450	245	+/-20	20
Material	Grade 300 mild steel to AS/NZS 3679.1 Galvanised mild steel to AS/NZS 4680		0.7mm galvanised sheet metal to AS/NZS 1365 and AS/NZS 1397		

Note: Contact the Leviat sales team for custom sizes.

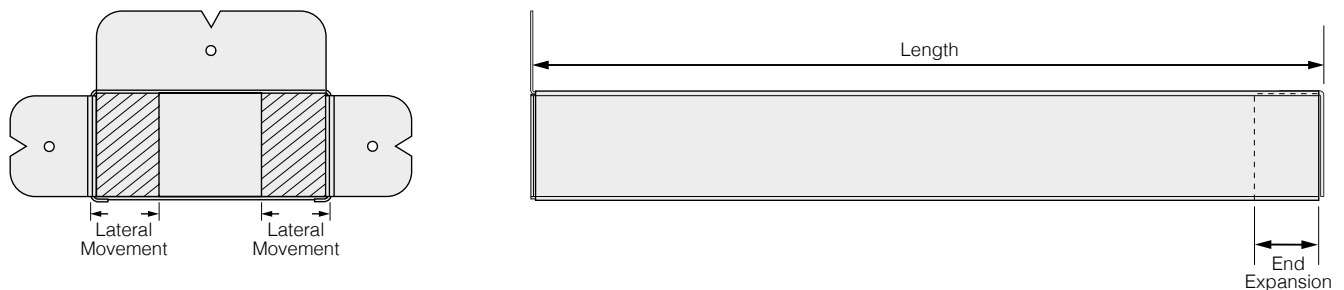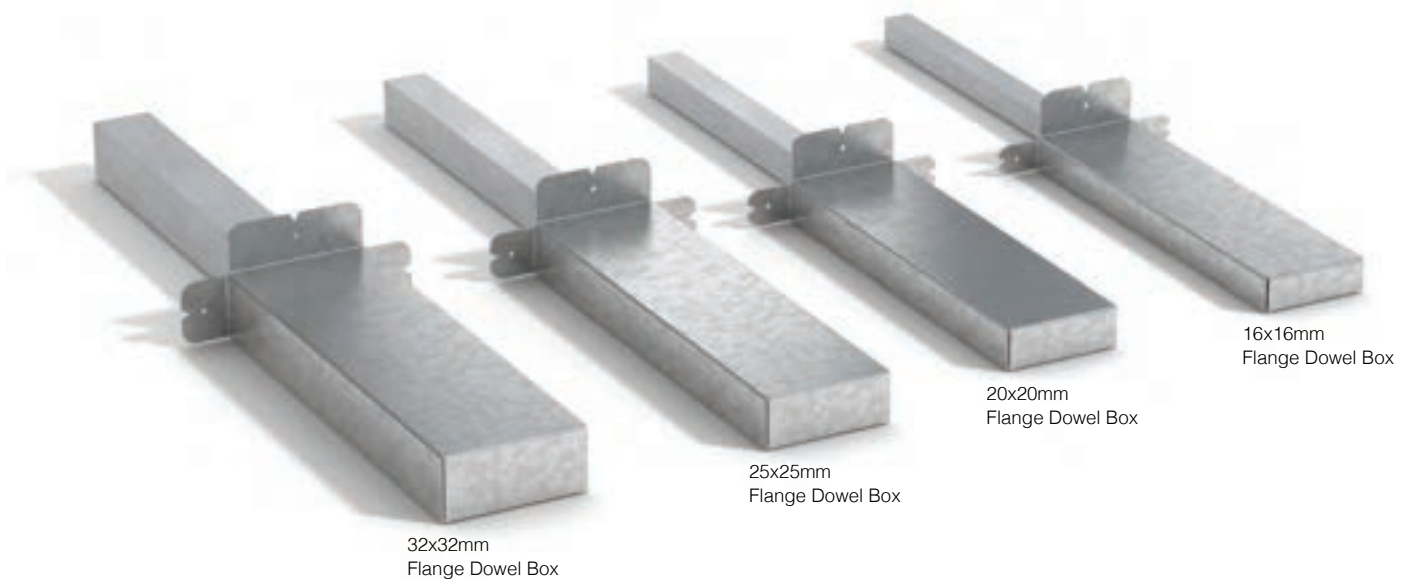

Part Number Identification (to order custom sizes)

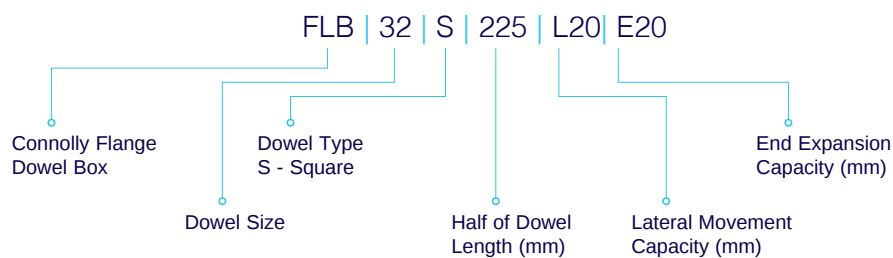

Design Capacities

The use of Connolly Flange Dowel Boxes ensures that shear loads are safely transferred across the joint through square dowels. We recommend referring to *TR34 – Fourth Edition – Concrete Industrial Ground Floors* to determine the dowel capacity.

Section 6.5 of TR34 provides guidance on the calculation of dowel capacities for the following failure modes.


Dowel Shear Capacity

The dowel shear capacities provided in the table below have been calculated using equation 18 of TR34.

Dowel	Thickness (t) (mm)	Finish	Shear Area (0.9·A) (mm ²)	Capacity (P _{sh}) (kN)
16x16 sq	16	HDG	230	36.1
20x20 sq	20	HDG	360	56.3
25x25 sq	25	HDG	563	88.0
32x32 sq	32	HDG	922	144.2

For the standard configuration of the flange dowel box, the shear strength will never govern the capacity of the joint.

Dowel shear capacity

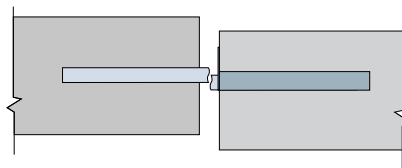


Dowel Bearing/Bending Capacity

Bearing/Bending is a combined failure mode that checks the bending capacity of the dowel as well as the bearing capacity of the surrounding concrete. Equation 19 of TR34 defines the bearing/bending capacity of a dowel.

Please find the dowel bearing/bending capacities for different conditions in the combined capacity tables on page 8.

Dowel bearing/bending failure mode

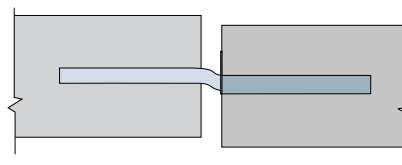


Punching Shear (Bursting Forces)

Section 6.5.3 of TR34 recommends calculating the bursting load of the concrete by adapting the EC2 approach for punching failure using an effective depth of 0.75 times the depth between the dowel and the surface of the concrete slab.


Please find the punching shear capacities for different conditions in the combined capacity tables on page 8.

Punching Shear (Bursting Forces)

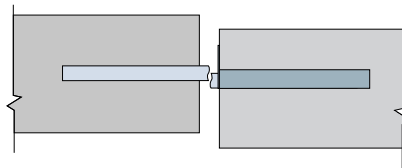


Design Capacities

The following tables provide single dowel capacities of standard Connolly Flange Dowel Boxes, calculated in accordance with TR34 for various joint widths in 32MPa concrete. The capacities provided in the tables are minimum values from the failure modes: dowel shear, dowel bearing/bending and punching/bursting. Colour coding indicates the governing failure mode. For any other configuration please contact the Leviat technical team.



Dowel bearing/bending failure mode



Punching failure mode

Single Dowel Capacity of Flange Dowel Box in 32MPa Concrete with 10mm Joint Opening										
Item Code	Dowel Size	Slab Height								
		150	175	200	225	250	275	300	350	400
FLB16S200L20E20	16x16 SQ-400	14.7	14.7	14.7	14.7	14.7	14.7	14.7	14.7	14.7
FLB20S200L20E20	20x20 SQ-400	17.6	22.9	24.1	24.1	24.1	24.1	24.1	24.1	24.1
FLB25S225L20E20	25x25 SQ-450	18.9	24.5	30.8	37.6	39.3	39.3	39.3	39.3	39.3
FLB32S225L20E20	32x32 SQ-450	18.3	24.0	30.3	37.2	44.7	52.8	61.5	66.9	66.9

Single Dowel Capacity of Flange Dowel Box in 32MPa Concrete with 20mm Joint Opening										
Item Code	Dowel Size	Slab Height								
		150	175	200	225	250	275	300	350	400
FLB16S200L20E20	16x16 SQ-400	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
FLB20S200L20E20	20x20 SQ-400	17.6	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7
FLB25S225L20E20	25x25 SQ-450	18.9	24.5	30.8	37.6	33.3	33.3	33.3	33.3	33.3
FLB32S225L20E20	32x32 SQ-450	17.8	23.4	29.6	36.3	43.7	51.8	58.6	58.6	58.6


Single Dowel Capacity of Flange Dowel Box in 32MPa Concrete with 30mm Joint Opening										
Item Code	Dowel Size	Slab Height								
		150	175	200	225	250	275	300	350	400
FLB16S200L20E20	16x16 SQ-400	9.15	9.15	9.15	9.15	9.15	9.15	9.15	9.15	9.15
FLB20S200L20E20	20x20 SQ-400	16.2	16.2	16.2	16.2	16.2	16.2	16.2	16.2	16.2
FLB25S225L20E20	25x25 SQ-450	18.6	24.2	28.4	28.4	28.4	28.4	28.4	28.4	28.4
FLB32S225L20E20	32x32 SQ-450	17.3	22.8	28.9	35.5	42.8	50.7	51.6	51.6	51.6

Single Dowel Capacity of Flange Dowel Box in 32MPa Concrete with 40mm Joint Opening										
Item Code	Dowel Size	Slab Height								
		150	175	200	225	250	275	300	350	400
FLB16S200L20E20	16x16 SQ-400	—	—	—	—	—	—	—	—	—
FLB20S200L20E20	20x20 SQ-400	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7	13.7
FLB25S225L20E20	25x25 SQ-450	18.1	23.6	24.5	24.5	24.5	24.5	24.5	24.5	24.5
FLB32S225L20E20	32x32 SQ-450	16.9	22.2	28.1	34.7	41.9	45.7	45.7	45.7	45.7

Single Dowel Capacity of Flange Dowel Box in 32MPa Concrete with 50mm Joint Opening										
Item Code	Dowel Size	Slab Height								
		150	175	200	225	250	275	300	350	400
FLB16S200L20E20	16x16 SQ-400	—	—	—	—	—	—	—	—	—
FLB20S200L20E20	20x20 SQ-400	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7
FLB25S225L20E20	25x25 SQ-450	17.6	21.4	21.4	21.4	21.4	21.4	21.4	21.4	21.4
FLB32S225L20E20	32x32 SQ-450	16.4	21.6	27.4	33.9	40.8	40.8	40.8	40.8	40.8




Installation Guidance

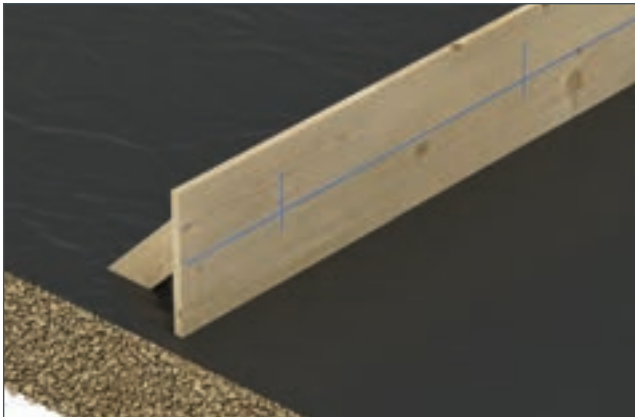


Step 1

Mark centre line of the Connolly Flange Dowel Box and dowel spacing on the formwork. Flange Dowel Box is normally installed at the mid-height of the slab.

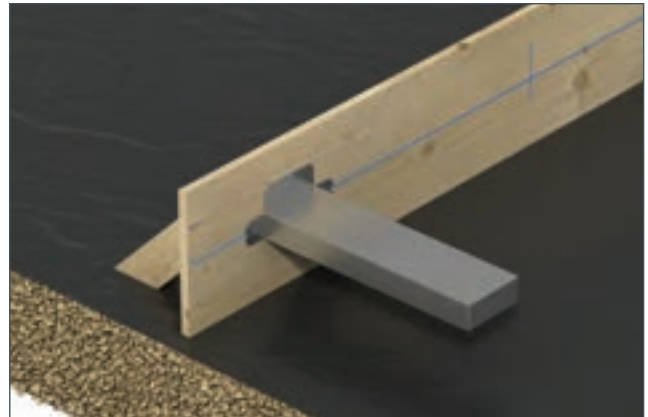

Step 2

Place the Connolly Flange Dowel Box at the marked location by using the V-Notches at the top and both sides to ensure correct placement.

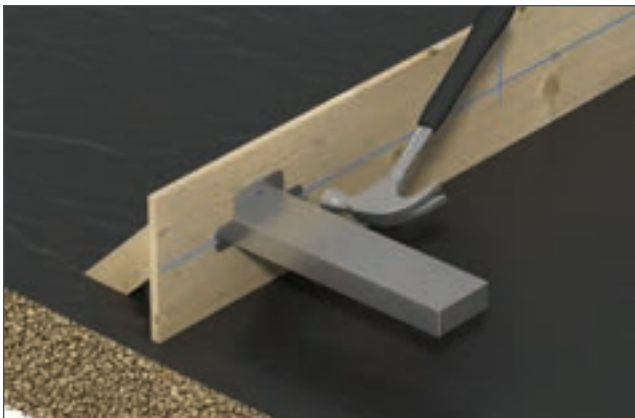

Step 3

Nail the Connolly Flange Dowel Box to the formwork using three nails.



Step 4

After pouring the first slab remove the formwork. After removal of formwork, Connolly Flange Dowel Box will be exposed as shown above.



Step 5

Firmly place the square dowel into the insertion hole in the flange dowel box by punching through the sticker as shown above.



Step 6

Once dowels have been correctly positioned, install the specified reinforcement and carry out the next pour. For expansion joints, install compressible material before second pour.

Connolly Product Range

Key Joint

Connolly Key Joints are a continuous pour solution for contraction joints in slab-on-ground applications. Key Joints are a roll formed galvanised steel section used as a leave-in-place formwork to control shrinkage induced cracking. The profile is fixed in place using 3m and 6m lengths for slab thickness from 100mm to 300mm.

Dowel Cradles

Connolly Dowel Cradles are used for load transfer in saw cut contraction joints. They are a welded wire assembly that ensures the horizontal and vertical alignment of dowels at the correct spacing and height. Manufactured in 3m lengths from 6mm wire, Connolly Dowel Cradles are available in a wide range of configurations to suit a variety of slab thicknesses and load requirements.

Expansion Joint System



The Connolly Expansion Joint System is a continuous pour solution for expansion joints in slab-on-ground applications. They are a roll formed galvanised steel section with 10mm cross linked foam to provide a leave-in-place formwork that allows for joint expansion. The profile has pre-drilled holes ensuring it can be used in conjunction with Connolly Universal Dowel Sleeves. The expansion joint profile is available in 3m lengths for slab thickness from 100mm to 200mm. Custom lengths and heights are available on request.

Universal Dowel Sleeves

Connolly Universal Dowel Sleeves are available for round and square dowels allowing load transfer across joints in slab-on-ground applications. The sleeve encases one half of the dowel to de-bond the dowel from the concrete. Our Universal Dowel Sleeves allow for expansion and contraction at the joint with the square variety also allowing for lateral movement at the joint.

Safety Caps

Connolly Safety Cushion Caps are designed to reduce the risk of injury on-site. Made from recyclable plastic, the safety caps are suitable for steel reinforcing bars N12-N32mm, as well as Star Pickets.

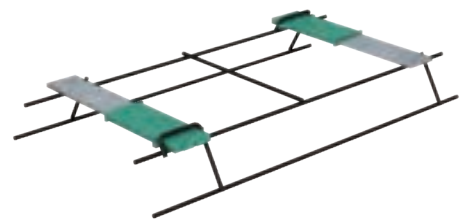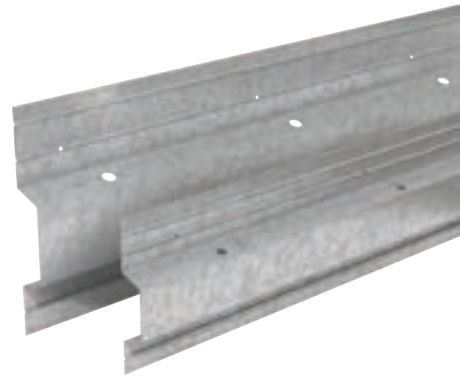

Contact Leviat worldwide

Australia

Unit A, 1 Heinrich Close,
Eastern Creek, Sydney, NSW 2766
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Industrielaan 2
1740 Ternat
Tel: +32 - 2 - 582 29 45
Email: info.be@leviat.com

China

Room 601 Tower D,
Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Pekařská 695/10a
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

6, Rue de Cabanis
31240 L'Union
Tel: +33 (0)5 34 25 54 82
Email: info.fr@leviat.com

Germany

Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

Unit S4, 902, A Wing,
Lodha iThink Techno Campus Building,
Panchpakhadi, Pokharan Road 2,
Thane, 400606
Tel: +91-022 695 33700
Email: info.in@leviat.com

Italy

Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

28 Jalan Anggerik Mokara 31/59
Kota Kemuning,
40460 Shah Alam Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Oostermaat 3
7623 CS Borne
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

246D James Fletcher Drive, Otahuhu,
Auckland 2024
Tel: +64 - 9 276 2236
Email: info.nz@leviat.com

Philippines

27F Office A, Podium West Tower,
12 ADB Avenue, Ortigas Center
Mandaluyong City, 1550
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

Ul. Obornicka 287
60-691 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

10 Benoi Sector,
Singapore 629845
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Polígono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Grenzstrasse 24
3250 Lyss
Tel: +41 (0)800 22 66 00
Email: info.ch@leviat.com

United Arab Emirates

RA08 TB02, PO Box 17225
JAFZA, Jebel Ali, Dubai
Tel: +971 (0)4 883 4346
Email: info.ae@leviat.com

United Kingdom

President Way,
President Park,
Sheffield S4 7UR
Tel: +44 - 114 275 5224
Email: info.uk@leviat.com

USA / Canada

6467 S Falkenburg Road
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed
Email: info@leviat.com

Notes regarding this document

© Protected by copyright. The information in this publication is based on state-of-the-art technology at the time of publication. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Leviat shall not accept liability for the accuracy of the information in this document or for any printing errors. We reserve the right to make technical and design changes at any time. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

For more information on the following products, please contact:

**Masonry, Structural and
Precast Concrete products:**

1300 304 320
info.ancon.au@leviat.com
Ancon.com.au

**Concrete Floor Jointing
products:**

1800 335 215
info.connolly.au@leviat.com
Connolly.com.au
info.isedio.au@leviat.com
Isedio.com.au

**Remedial Masonry
products:**

1300 667 071
info.helifix.au@leviat.com
Helifix.com.au

General Enquiries

1300 304 320
Leviat.com

Sales Offices and Production

New South Wales, Sydney

Unit A, 1 Heinrich Close,
Eastern Creek | Sydney
NSW 2770

New South Wales, Casino

10 Irving Drive
Casino
NSW 2470

Victoria

9/63-69 Pipe Road
Laverton North | Melbourne
VIC 3026

Queensland

4/15 Terrace Place
Murarrie | Brisbane QLD 4172

South Australia

Unit 2/35-37 Maxwell Road
Laverton North | Adelaide
SA 5095

Western Australia

18 Tennant Street,
Welshpool | Perth
WA 6106

Leviat.com

Leviat®

Imagine. Model. Make.

Leviat.com